



FLEX AUGER

RELIABILITY

HIGH DURABILITY


FLEXIBLE SOLUTION

LIVESTOCK & INDUSTRIAL APPLICATION

COMPATIBLE WITH EXISTING INSTALLATION



CODE	OUTSIDE Ø (D) mm	INSIDE Ø (d) mm	PITCH (P) mm	STRIP WIDTH (A) mm	THICKNESS (e) mm	LENGHT COIL m	WEIGHT COIL Kg	TUBE Ø mm
G02013013138	34,0	18	38	8,0	3,3	120	72,0	45
G02013022140	38,0	22	40	8,0	3,3	100	55,0	55
G02013033141	44,0	28	41	8,0	3,3	100	58,0	60
G02013041440	56,0	35	40	10,5	4,5	100	135,0	75
G02013042140	56,0	35	40	10,5	4,0	100	117,5	75
G02013053150	67,0	45	50	11,0	5,0	50	80,0	90
G02013051250	68,4	45	50	11,7	4,3	50	72,5	90
G02013052150	68,4	45	50	11,7	4,3	50	73,7	90
G02013062166	93,0	65	66	14,0	5	30	58,5	125
G02013061166	95,0	65	66	15,0	4,3	30	63,0	125

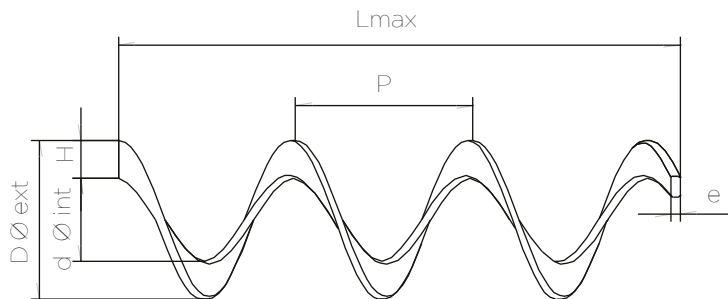

- High resistance tempered steel auger for a long service life.
- Economical and efficient solution for the transport of grainy or mashing products for Livestock or industrial sector where it is not necessary a big flow of production per hour.
- For use in straight or curved sections even for considerable lengths.
- Low energy consumption.
- Different lengths, pitches and diameters.
Transport capacity from 400 kg/h to 4000 kg/h.
- Reduction in the workforce and ease of use.
- Longitudinal cut to size, without welds to minimize risk of breakage.